



PROFESSORSHIP OF ENERGY PROCESS ENGINEERING | EVT

Institute of Energy Process Engineering and Chemical Engineering | IEC
TU Bergakademie Freiberg
Prof. Dr.-Ing. Martin Gräbner



INSTITUTE OF
ENERGY PROCESS ENGINEERING AND
CHEMICAL ENGINEERING

ELECTRICIANS
BUSINESS ADMINISTRATORS
MECHANICAL ENGINEERS
TEAM
PROCESS ENGINEERS
MATHEMATICIANS
CHEMICAL ENGINEERS
MATERIAL ENGINEERS
PSYCHOLOGISTS
MINERALOGISTS
CONTROLLER
CHEMISTS
MEDIA DESIGNERS
INDUSTRIAL ENGINEER
COMPUTER SCIENTISTS
ELECTRONIC TECHNICIANS
PHYSICISTS
ASSISTANCE
PLANT OPERATOR
TECHNICIANS
METALLURGISTS
LABORATORY ASSISTANTS



Content

Mission	5
R&D Topics	6
TOWARDS A NET-ZERO CIRCULAR CARBON ECONOMY	7
R&D Divisions	8
Infrastructure & Equipment	10
PILOT FACILITIES	10
FlexiSlag Gasification Plant	11
FlexiSyn Gasoline Plant	12
FlexiPOX Partial Oxidation Plant	13
FlexiEntrained Gasification Plant	14
LTG Pyrolysis Plant	15
CTC Pyrolysis Plant	15
BENCH-SCALE FACILITIES	16
Gasoline Synthesis Plant (STF+)	16
FlexiFluidized Gasification Plant	17
MultiFeed Gasification Plant	18
KIVAN Gasification Plant	19
Catalytic Steam Reformer/Methane Pyrolysis Plant	20
Plasma Gasification Plant	21
Further Gasification Equipment	23
PYMEQ Pyrolysis Plant	24
Pyrolysis Rotary Kilns	25
Further Pyrolysis Equipment	25
Further Bench-Scale Equipment	26
LABORATORY FACILITIES	29
Highlights of Laboratory Equipment	30
X-Ray Fluorescence (XRF) and X-Ray Diffraction (XRD)	30
Scanning Electron Microscopy (SEM)	30
Thermo-Optical Measurement (TOMAC/TOMMI)	31
High Temperature Viscometer	31
Pressurized Thermogravimetric Analysis	32
Thermal Analysis (TG, DSC, DTA, EGA)	32
Inductive Coupled Plasma Optical Emission Spectroscopy (ETV-ICP OES)	33
Comprehensive Gas Chromatography Mass Spectrometry (GCxGC-MS)	33
MODELING & SOFTWARE TOOLS	34
R&D Service Portfolio	35

Communication & Knowledge Transfer

36

INTERNATIONAL FREIBERG CONFERENCE (IFC)	36
NETWORK FOR A CIRCULAR CARBON ECONOMY (NK2)	37
COMPACT COURSES	38
CARBON DISCOVERY TRAIL	39

Mission

The education and R&D profile of the Professorship of Energy Process Engineering (EVT) focus on the electrification of circular carbon and hydrogen technologies via the e^-CH_2T -Concept:

e⁻ Integration of electricity via plasma discharge, conduction, induction, radiation or generation of auxiliary substances (e.g. O₂, H₂) in chemical reactions

C Closing of the carbon cycle through chemical recycling, utilization of biogenic waste and the development of CO₂ sources (e.g. for e-Fuels or e-Chemicals)

H₂ Production of hydrogen on the basis of biogenic waste, pyrolytic splitting of hydrocarbons and reforming/partial oxidation with integrated CO₂ management

T Development of technologies – building on classic thermochemical conversion processes (i.e. gasification and pyrolysis) and supported with life-cycle and techno-economic assessments – for industrial applications



R&D Topics

#CHEMICAL RECYCLING

Chemical recycling – also known as feedstock recycling – is based on the conversion of carbon-containing waste into basic chemical building blocks to enable the manufacturing of new chemical products from them. As a result, waste becomes a resource within the circular economy as carbon is incorporated into new products instead of being emitted as CO₂, as is the case with waste incineration.

In this context, we look at the primary thermochemical conversion of a wide variety of waste and residual materials by pyrolysis and gasification, including peripheral processes, as well as the technical, socio-ecological and economic evaluation of the entire process chains from feedstock to product. One focus is on the integration of electricity and hydrogen from renewable sources.

#SUSTAINABLE HYDROGEN

Hydrogen plays a central role in the realization of a climate-neutral economy. To achieve this, the supply of hydrogen itself must be climate-neutral and thus sustainable.

Our research focuses on hydrogen production via electrothermal or thermochemical conversion processes. These include the pyrolytic cracking of methane, which produces so-called „turquoise“ hydrogen, and the gasification or reforming of biogenic waste and residual materials with subsequent maximization of the hydrogen yield.

#CO₂-NEUTRAL MOBILITY

The use of CO₂-neutral synthetic liquid fuels is a climate-friendly complement to electric- and hydrogen-based mobility. Not only can they directly replace fuels from fossil sources, but they can also be mixed with them in any ratio (drop-in capability) as well as serve as a global energy carrier. This enables a continuous transition to these synthetic fuels, including the use of existing infrastructure for distribution and sales. While defossilizing the existing vehicle fleet, the future fields of application will be in particular aviation but also shipping and heavy duty transport.

The focus of our research is the synthesis of CO₂-neutral fuels based on methanol from laboratory to pilot scale including performance optimization and process chain evaluation.

#KEY CONVERSION TECHNOLOGIES


Gasification

In thermochemical conversion by gasification, carbon carriers are converted into a gas containing H₂ and CO at temperatures above 700 °C using a gasification agent. This synthesis gas serves as a C1-building block for the chemical industry and the origin for a wide range of products. In addition to hydrogen and synthetic fuels, platform chemicals such as alcohols, paraffins, olefins and ammonia can be produced from it. Gasification is attractive for the recycling of waste materials due to its high flexibility and scale-up potential. Electrification of the process allows minimization of the CO₂-footprint.

Pyrolysis

Pyrolysis is the thermal decomposition of carbonaceous materials into oil, char and gas at temperatures of 400 - 600 °C in the absence of oxygen. Integration of electrical power holds the potential to simplify the process and lower CO₂ emissions. It is an established thermochemical process for the production of liquid hydrocarbons as well as for waste processing, e.g. for the recovery of metals and fibers from composite materials. The use of the waste-based pyrolysis oil in refinery processes as a naphtha-substitute is a preferred process route for the chemical recycling of used plastics in particular.

TOWARDS A NET-ZERO CIRCULAR CARBON ECONOMY

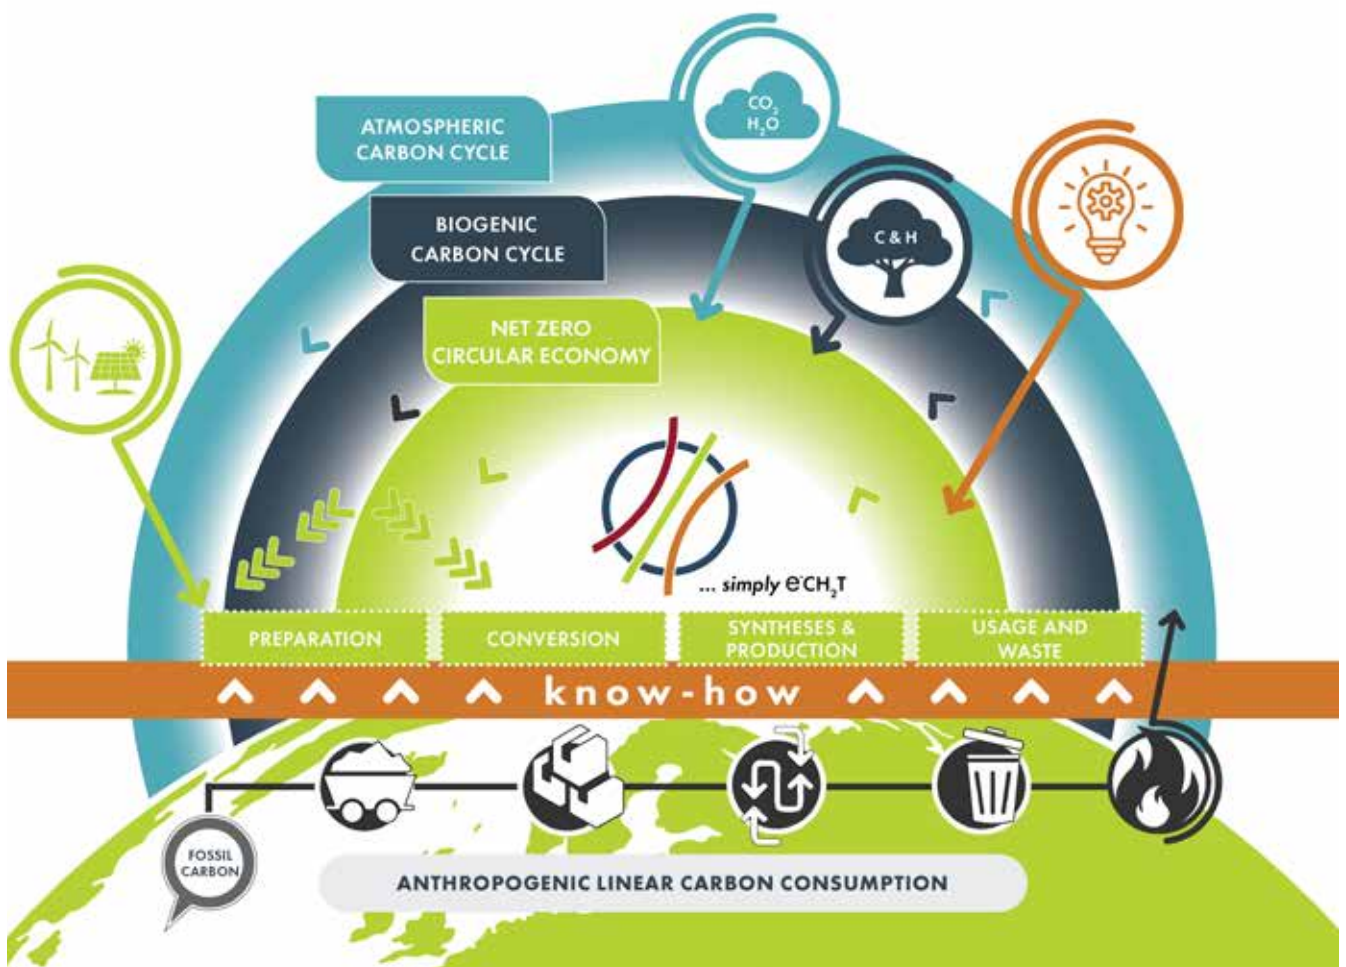

R&D Structure



ASSISTANCE
Jeanett Schumann



SUBJECT MATTER EXPERT
Prof. Dr.-Ing. Bernd Meyer



Prof. Dr.-Ing. Martin Gräbner

PeC Plasma-enhanced Conversion



HEAD OF DEPARTMENT
Dr.-Ing. Ronny Schimpke



DEPUTY OF DEPARTMENT
Dipl.-Ing. Viktoriia Kison

« We investigate and optimize the innovative integration of plasma technologies in thermochemical primary conversion as well as in gas cleaning and upgrading processes. »

TCC Thermo-Chemical Conversion



HEAD OF DEPARTMENT
Dr.-Ing. Stefan Guhl



DEPUTY OF DEPARTMENT
M.Sc. Stefan Thiel

« We analyze carbonaceous feedstock and its behavior in thermochemical conversion processes with particular focus on the inorganic compounds in order to develop and optimize solid fuel pyrolysis and gasification technologies. »

CCT Circular Carbon Technologies



HEAD OF DEPARTMENT
Dr.-Ing. Jörg Kleeberg

« We develop and commercialize carbon conversion technologies focusing on pyrolysis to drive the circular carbon economy via chemical recycling. »

ST Syngas Technologies



HEAD OF DEPARTMENT
Dr.-Ing. Peter Seifert



DEPUTY OF DEPARTMENT
M.Sc. Malena Peuker

« We optimize and scale-up advanced partial oxidation technologies for liquid and gaseous feedstocks with CO₂ integration as well as synthesis processes for the production of CO₂-neutral synthetic fuels from methanol. »

TA Technology Assessment



HEAD OF DEPARTMENT
M.Sc. Antonia Helf



DEPUTY OF DEPARTMENT
Dr.-Ing. Florian Keller

« We utilize an integrated approach to evaluate technologies and process routes along social-technological-ecological-economical-political dimensions to support decision-making and socio-political dialogues at the nexus of science, technology and society. »

INSTITUTE DIRECTOR (EVT)
INSTITUTE OF ENERGY PROCESS ENGINEERING AND CHEMICAL ENGINEERING

PROFESSORSHIP OF ENERGY PROCESS ENGINEERING (EVT)

DIVISION HEAD (FREIBERG) ENERGY AND PROCESS ENGINEERING |
CIRCULAR CARBON TECHNOLOGIES |
FRAUNHOFER INSTITUTE FOR CERAMIC TECHNOLOGIES AND SYSTEMS (IKTS)

DEPUTY DIRECTOR OF THE
CENTRE FOR EFFICIENT HIGH-TEMPERATURE MATERIAL CONVERSION

Laboratory



LABORATORY MANAGER
Dr. rer. nat. Marcus Schreiner



DEPUTY LABORATORY MANAGER
Dr. rer. nat. Anja Guhl

« We analyze solid, liquid and gaseous samples along the process chain using standardized as well as advanced and unique proprietary analysis methods. »

Plant Operation



HEAD OF DEPARTMENT
Dipl.-Ing. Olaf Schulze

« We operate a full range of bench-scale and pilot-scale facilities to support technology development and optimization as well as validation of developed solutions. »

Controlling



HEAD OF DEPARTMENT
Dipl.-Wirt.-Sin. (FH) Kristin Wiczorek

« We support the timely and smooth execution of public-funded and industry projects. »

ZeHS Center for Efficient High Temperature Processes and Materials Conversion


« We investigate and develop efficient high temperature conversion processes using an interdisciplinary approach and capitalizing on the expertise and know-how of multiple professorships and institutes at the TU Bergakademie Freiberg. »

DBI-Virtuhcon GmbH (spin-off/an-institute)

« We facilitate the timely and efficient transfer of our rich expertise, experience and know-how in the fields of thermochemical conversion. »

Infrastructure & Equipment

PILOT FACILITIES

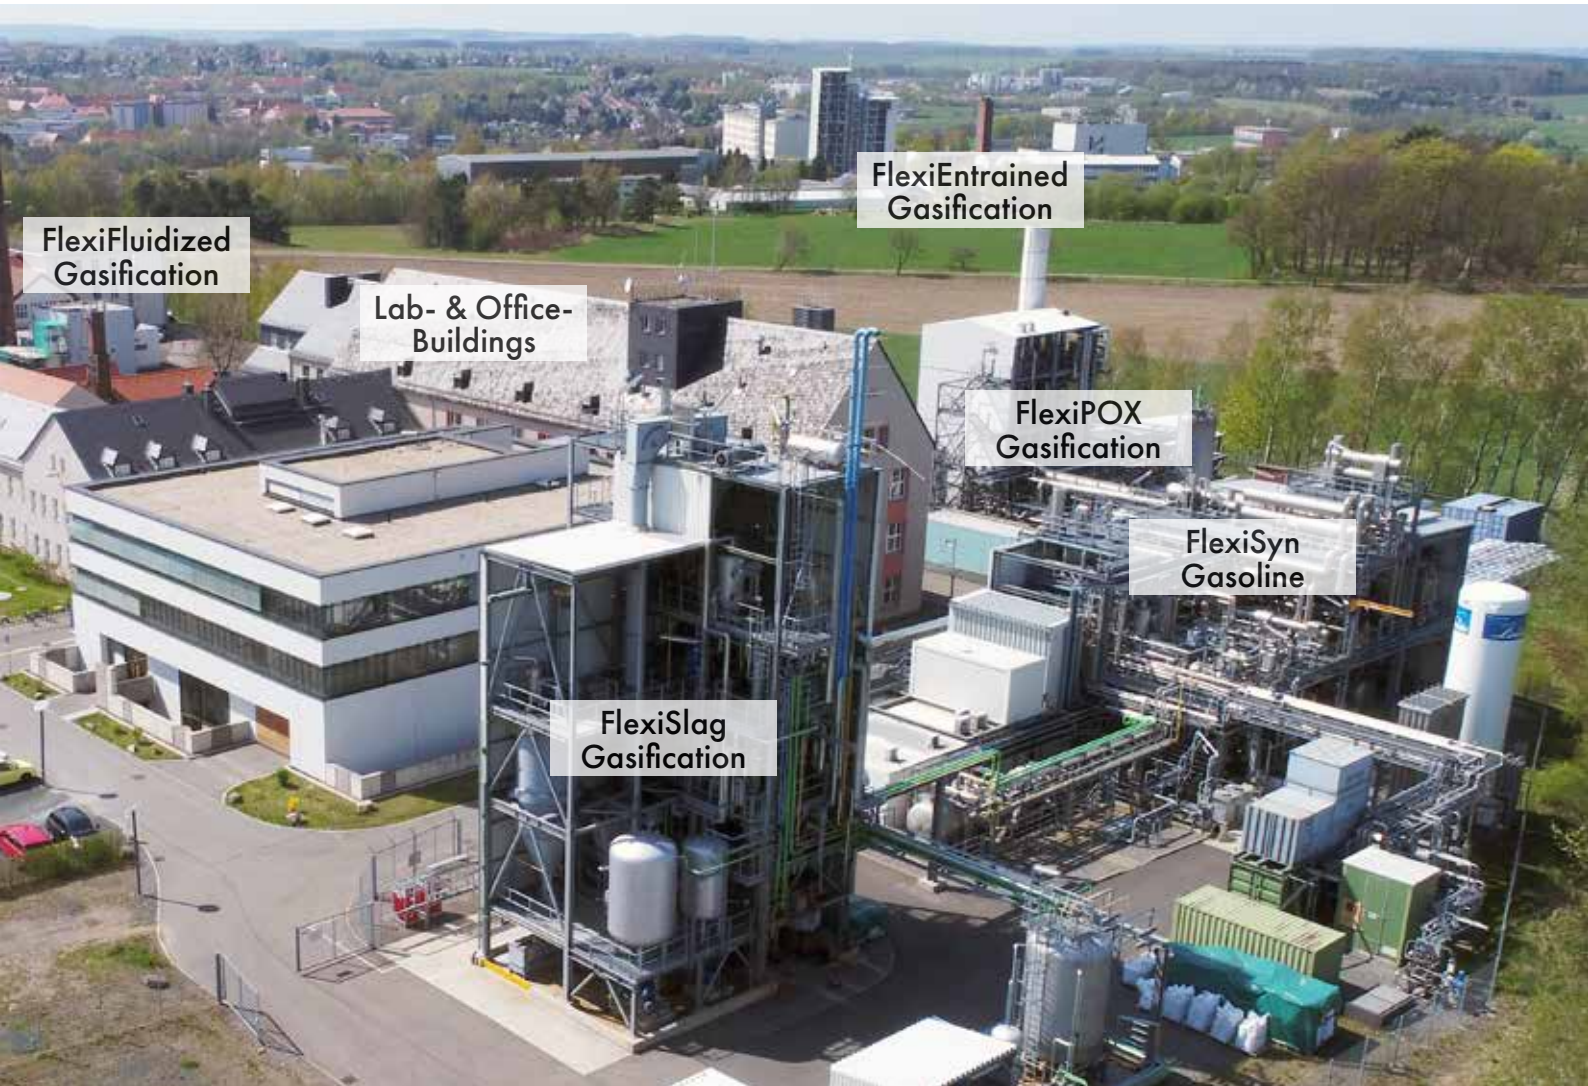



FlexiSlag Gasification Plant

The FlexiSlag is a next generation fixed-bed slagging gasifier designed for high feedstock flexibility. It offers variable gas qualities for hydrogen application, syngas application (i.e. low dust, tar and phenols-free, low CxHy), or SNG and liquid products application (i.e. low dust, rich in light oil and CxHy). Additionally, it also exhibits high thermal and cold gas efficiency, low oxygen and steam consumption and practically no carbon loss. Furthermore, it has minimal environmental impacts as contaminants are contained in vitrified i.e. glassy slag.



...simply eCH₂T

Highlight

Enables mixed, contaminated and challenging carbon-containing waste materials which are not suitable for mechanical recycling and pyrolysis to be used as secondary raw material for chemical production.

Key Facts

- Thermal capacity: 10 MW
- Pressure: 40 bar(g)
- Throughput: up to 1.4 t/h solid carbon feedstock
- Gasification agents: O₂ max. 430 m³(STP)/h;
Steam max. 450 kg/h
- Gas output: max. 2300 m³(STP)/h

Feedstock

- Coal (char coal, lignite, anthracite), petcoke, waste coke from thermal treatments
- Biomass (wood chips, torrefied pellets, straw pellets, ...)
- Different types of waste (MSW, mixed plastic residues, sewage sludge, carbon-fiber and glass fiber composites, automotive shredder, ocean waste, ...)
- ...

R&D Focus

- Process validation of different carbon feedstock and blends
- Influence of fuel preparation and fluxing agents on ash/slag behavior
- Influence of variation of gasification conditions and agents on carbon conversion rate and syngas quality
- Variation of yield and composition of tars, oils, SNG, CO+H₂ in syngas
- Development of processes and components
- Determination of performance indicators for upscaling
- ...

Operation

- Since 2015

 Test Campaign in the FlexiSlag





Highlight

Project DeCarTrans (Demonstrating a Circular Carbon Economy along the Value Chain) 2023-2026: Production of about 380,000 litres of synthetic gasoline from renewable methanol for material, emission and car fleet tests by project partners/ selected end users

FlexiSyn Gasoline Plant

The "FlexiSyn Gasoline" is a plant designed to demonstrate the production of high-octane gasoline. Originally, the synthesis route was separated into two steps: conversion of syngas (generated via ATR treatment of natural gas) into methanol followed by the subsequent innovative isothermal synthesis process of methanol to gasoline (MtG). Today, only the gasoline production operates using renewable methanol. Technology partner is the CAC Engineering GmbH (former Chemieanlagenbau Chemnitz GmbH).

Key Facts

- Gasoline synthesis: 5 bar to 7 bar
- Stabilized gasoline output: up to 1000 litres/day @ RON 93-95

Feedstock

- Bio-methanol or e-methanol

R&D Focus

- Improvement of operating conditions, process efficiency and gasoline quality
- New catalysts to increase selectivity
- Optimization of product treatment
- Demonstration of long-term operation
- ...

Operation

- Since 2010



🔗 Test Campaign in the FlexiSyn Gasoline

FlexiPOX Partial Oxidation Plant

The FlexiPOX plant is designed for high pressure partial oxidation of gaseous and liquid hydrocarbons. It can be operated in the autothermic catalytic reforming (ATR) mode, or as autothermic non-catalytic partial oxidation mode for natural gas (Gas-POX) or liquid hydrocarbons such as oil residues from refineries or pyrolysis oil from chemical recycling (MPG or Oil-POX).

Key Facts

- Thermal capacity: 5 MW
- Pressure: up to 100 bar(g)
- Temperature: up to 1500 °C
- Throughput: 500 m³(STP)/h gaseous feedstock or 500 kg/h liquid feedstock
- Gas output: 1500 m³(STP)/h syngas

Feedstock

- Natural gas
- Oil residues
- Pyrolysis oil

R&D Focus

- Variation of steam-to-feed ratio
- Influence of pressure and temperature on syngas quality
- Analysis of product streams including trace components
- Energetic, exergetic and material balancing
- Development and test of innovative burners
- Optical device for flame assessment and validation of CFD-calculations
- ...

Operation

- Since 2004



Highlight

Unique optical devices enable real time determination and verification of flame conditions under high temperature and high pressure operating conditions using customer designed burners.





Highlight

Technology is widely implemented commercially for coal-to-chemicals today. Over 60 carbon feedstocks (including different types of waste materials) were tested in over 100 test campaigns in the Freiberg facility.

FlexiEntrained Gasification Plant

The FlexiEntrained (GSP gasification process) is an entrained-flow gasifier with a water-cooled cooling screen, a full spray water quench for gas cooling, a Sulferox plant for desulfurization as well as a waste water treatment plant. It operates with pulverized or liquid (slurry) feedstock. The generated syngas is free of hydrocarbons with very low amount of methane. It is able to convert a broad variety of carbon feedstock into a high-quality tar-free syngas and vitrified slag which is environmentally neutral. Furthermore, it features a pneumatic feeding test rig of commercial scale.

Key Facts

- Thermal capacity: 5 MW
- Pressure: 26 bar(g)
- Gas output: 1000 m³(STP)/h syngas
- Throughput: up to 450 kg/h of pulverized solid feedstock or slurry
- Gas treatment: desulphurization unit (Sulferox), COS hydrolysis, HCN hydrolysis
- Waste water treatment plant
- Test rig for solid fuel feeding up to 300 t/d

Feedstock

- Coal (lignite, hard coal, anthracite) and petcoke
- Biomass
- Sewage sludge
- Torrefied residue derived fuels from MSW
- Slurries
- ...

R&D Focus

- Process validation of different carbon feedstock and mixtures
- Influence of fuel preparation and fluxing agents on ash/slag behavior
- Influence of variation of gasification conditions and agents on carbon conversion rate and syngas quality
- Process optimization and test of components (innovative burners, measurements, ...)
- Optical probe systems
- ...

Operation

- Since 2018 (in cooperation with DBI-Virtuhcon)



LTG Pyrolysis Plant

The low temperature gasification (LTG) plant is a continuous mode pyrolysis plant to convert different carbon-rich biomass or waste into pyrolysis coke and tar-/oil-containing pyrolysis gas. It can be operated fully electric in allothermal mode or autothermal with agents to provide heat for pyrolysis. The LTG plant is part of the Fraunhofer IKTS pyrolysis platform.

Key Facts

- Temperature: 250-550 °C
- Pressure: atmospheric pressure
- Throughput: 125 kg/h

Feedstock

- Biogenic waste and agricultural residues
- MSW/RDF
- Mixed plastic waste

R&D Focus

- Allothermal as well as autothermal (future expansion) process
- Feedstock flexibility
- Production of tar-free char (biogenic coke)
- Production of pyrolysis gas for further applications
- Torrefaction

Operation

- 2023



Highlight

The IKTS pyrolysis platform serves both: the conversion of feedstock to char or to liquid products at a relevant scale.

CTC Pyrolysis Plant

The catalytic tribo-chemical (CTC) pyrolysis technology is used to convert different carbon-containing wastes into pyrolysis oil as steam cracker feedstock. Technology partner is Carboliq GmbH. The CTC plant is part of the Fraunhofer IKTS pyrolysis platform.

Key Facts

- Temperature: < 400 °C
- Pressure: atmospheric pressure
- Throughput: 20-30 kg/h
- Oil output: 10-15 kg/h

Feedstock

- Biomass
- MSW/RDF
- Mixed plastic waste
- Biogenic waste

R&D Focus

- High oil yield
- Feedstock flexibility
- High degree of heat coupling by frictional heat input
- Low emissions (no dioxin and furan)
- In-situ neutralization of halogens

Operation

- 2023



BENCH-SCALE FACILITIES

Gasoline Synthesis Plant (STF+)

The Gasoline Synthesis Plant enables the synthesis of high-octane gasoline from methanol at bench scale. Operation conditions can be varied within a wide range. The test facility is also suitable for operation in the methanol-to-olefins mode.

Key Facts

- Temperature: 320-400 °C
- Pressure: 4-6 bar
- Throughput: 2-5 l/h methanol
- Reactor: catalyst-filled tube, height 3 m, volume 1.8 l
- Temperature control: molten salt
- 4 levels of sampling points

Feedstock

- Methanol (pure or diluted)

R&D Focus

- Optimization of operating conditions to increase gasoline quality
- Catalyst tests and benchmarking
- Optimization of catalyst regeneration procedures



FlexiFluidized Gasification Plant

The FlexiFluidized plant is a fluidized-bed gasifier developed and designed by IEC-EVT. It combines an internal circulating fluidized bed with a moving bed gasification zone to achieve high carbon conversion rates for fine as well as coarse particles. It is especially suited for feedstocks with high ash content.

Key Facts

- Thermal capacity: 125 kW
- Wall temperature: 1100 °C
- Pressure: atmospheric pressure
- Throughput: max. 20 kg/h of solid carbon feedstock
- Gasification agents: O₂, H₂O, CO₂
- Gas treatment: warm gas ceramic candle filter
- Online sampling ports for gas and solids at various stages

Feedstock

- High ash lignite
- Sewage sludge
- Biogenic waste and residues
- Different types of waste
-

R&D Focus

- Investigation of the internal circulation gasification principle for diverse carbon feedstock
- Optimization of process design for waste/biomass and high-ash feedstock
- Improved mass and energy balances based on various online measurements and sampling ports
- Generation of validation data for advanced modelling (CFD and flowsheet) to support upscaling
- ...



MultiFeed Gasification Plant

The MultiFeed is an entrained-flow gasification test plant with optical access on multiple levels. It is designed to operate with gaseous (e.g. natural gas) as well as liquid (e.g. gasoil) and solid feedstock (e.g. coal) and is equipped with a refractory lined reactor vessel and a subsequent quench section.

Key Facts

- Temperature: up to 1600 °C
- Pressure: atmospheric pressure
- Throughput: 100 kg/h solids , 70 l/h liquids, 100 m³/h gases (natural gas equivalent)




Feedstock

- Solids
- Liquids
- Gases

R&D Focus

- Online optical detection and analysis of entrained-flow burner flame
- Burner development
- Validation of CFD models (e.g. flame shape)
- Tests of refractory material (e.g. towards reactor atmosphere related intrusion)
- Development and test of optical devices
- ...



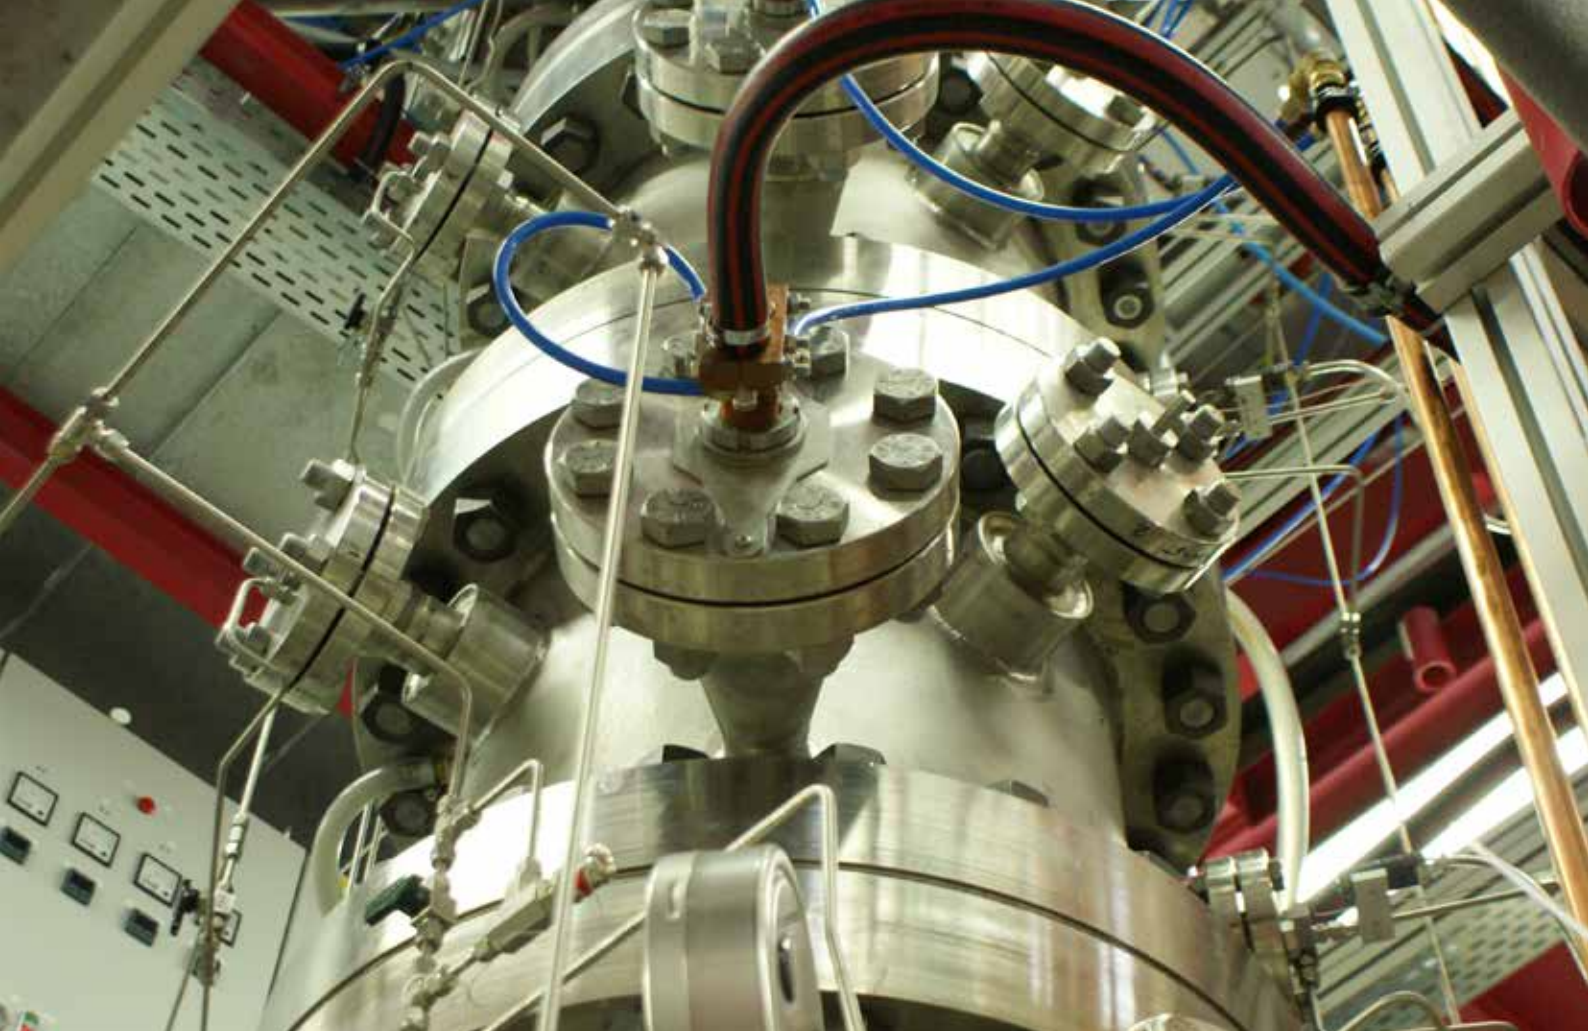

KIVAN Gasification Plant

The KIVAN gasifier is a high-pressure drop tube gasification reactor, especially designed for the determination of reaction kinetics and residence time behavior.

Key Facts

- Temperature: up to 1100 °C
- Pressure: up to 100 bar
- Throughput: char \leq 1 mm, max. 1.5 kg/h
- Gasifying agents: up to 300 l(STP)/min of CO₂ and up to 14.4 kg/h of steam
- Other gases: N₂ or Argon, H₂ and CO possible
- Electrically heated
- Heating length of 2.8 m and ID = 70 mm
- 4 levels of gas sampling points and optical ports over the heated length
- 12 gas sampling points for concentration profile

Feedstock

- Coal char
- Biomass char
- Char from different types of waste
- ...

R&D Focus

- Determination of high pressure heterogeneous gasification kinetics including diffusion controlled regime and inhibition effects
- Particle residence time

Catalytic Steam Reformer/Methane Pyrolysis Plant

The Catalytic Steam Reformer/Methane Pyrolysis Plant is a highly flexible bench-scale plant for various applications such as catalytic steam reforming, methane pyrolysis, ammonia cracking and other homogeneous gas reactions or gas-solid reactions. Further applications are exposure tests of diverse materials (e.g. refractory, metals, catalysts) and the determination of reaction kinetics.

Key Facts

- Temperature: 1350 °C
- Pressure: atmospheric pressure
- Heated tube length: 2 m
- Inner diameter: 90 mm
- Tube material: SiSiC/graphite (further materials available)
- Operation modes: countercurrent moving, moving fluidized or fixed bed
- Continuous solid feed and discharge: 30 kg/h
- Gas supply: Ar, CO, CO₂, CH₄, H₂, N₂ with up to 6.0 m³/h (STP) each gas
- Hydrogen produced: 12 m³(STP)/h

Feedstock

- Coal char (lignite, hard coal, anthracite) and petcoke
- Biomass char
- Torrefied residues
- Methane



ZENTRUM FÜR EFFIZIENTE
HOCHTEMPERATUR-STOFFWANDLUNG

Center for Efficient High Temperature Processes
and Materials Conversion (ZeHS)



Plasma Gasification Equipment

Fixed Bed Plasma Gasification Plant

Key Facts

- Temperature: up to 5000 °C
- Pressure: atmospheric pressure
- Throughput: max. 15 kg/h solid feed
- Plasma forming gases: steam, N₂, air, CO₂
- Electrical power: 65 kW (Plasma torch)
- Gas output: syngas max. 30 m³(STP)/h

Feedstock

- Sewage sludge
- Plastic-containing waste
- Carbon- and glass-fiber reinforced waste materials
- ...


R&D Focus

- Eco-friendly utilization of challenging waste
- Hot gas cleaning using plasma-assisted tar cracking
- Mass and energy balancing for different feedstock
- Development and testing of new plasma torch electrodes
- ...



Microwave Plasma Gasification

Two microwave plasma torches for plasma-integration into bench-scale gasification plants are available at the IEC. They can be applied for either direct conversion of a raw feedstock into high-grade syngas or to upgrade a low-quality gas, e.g. a tar-loaded pyrolysis gas.

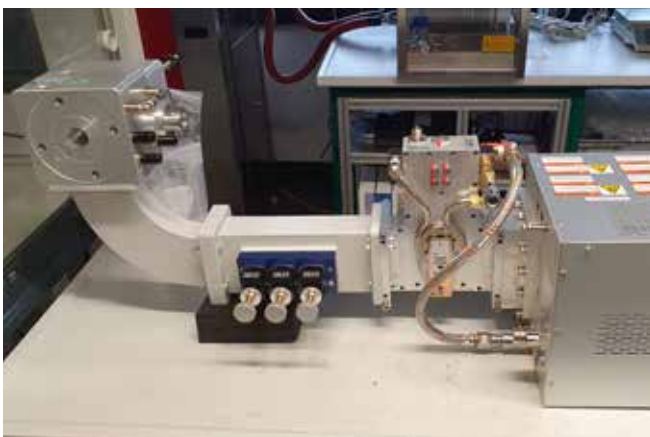

Key Facts

- Temperature: up to 3200 °C
- Pressure: 0-0.5 bar(g)
- Plasma gas throughput: max. 12 m³/h
- Plasma forming gases: CO₂, N₂, air
- Electrical power: 6 kW (single plasma torch)



Entrained Bed Plasma Gasification Plant

Key Facts

- Wall temperature: up to 1500 °C
- Pressure: up to 10 bar(g) (depending on plasma system)
- Plasma forming gases: CO₂, N₂, air
- Electrical power: 12 kW (two plasma torches)
- Syngas output max. 15 m³(STP)/h

Feedstock

- Solids: sewage sludge, (torrefied) wood, powdered plastic-containing waste, ...
- Liquids: Tars/oils from pyrolysis, crude oil, ...
- Gases: Reverse water-gas-shift, ammonia splitting, dry reforming, methane pyrolysis, ...



R&D Focus

- Mass and energy balancing of plasma assisted entrained bed gasification
- Benefits and limits of microwave plasma integration
- CFD modeling of plasma gasification processes
- Pyrolysis gas cleaning
- ...

Lab-Scale Plasma Gasification Unit I

Key Facts

- Pressure: atmospheric
- Throughput: max. 2 m³/h
- Plasma forming gases: CO₂, N₂, air
- Electrical power: 1 kW

Feedstock

- Pelletized solids: sewage sludge, (torrefied) wood, plastic-containing waste, ...

R&D Focus

- Feedstock suitability characterization
- Gas analysis
- Surface treatment and activation
- Benefits and limits of potential-free plasma incorporation

Lab-Scale Plasma Gasification Unit II

Key Facts

- Pressure: atmospheric
- Plasma forming gases: CO₂, N₂, air
- Electrical power: 6 kW
- Syngas output max. 6 m³(STP)/h

Feedstock

- Liquids: ethylene glycol to simulate pyrolysis tars/oils
- Gases: Reverse water-gas-shift, dry reforming, methane pyrolysis

R&D Focus

- Energy and mass balancing
- Benefits and limits of microwave plasma incorporation
- Pyrolysis gas cleaning
- ...



ZENTRUM FÜR EFFIZIENTE
HOCHTEMPERATUR-STOFFWANDLUNG



Center for Efficient High Temperature Processes
and Materials Conversion (ZeHS)

Further Gasification Equipment

R&D Focus

- Heterogeneous reaction kinetics of char gasification, including diffusion controlled regime and inhibition effects
- Investigation of methane pyrolysis

HTR drop tube reactor

Key Facts


- Temperature: $\leq 1450\text{ }^{\circ}\text{C}$
- Pressure: atmospheric pressure
- Feedstock: $\leq 0.5\text{ mm}$
- ID = 30 mm (ceramic tube)
- Atmosphere: CO_2 , H_2O , CO , H_2 , Ar , CH_4
- Online gas chromatography (GC)



Quartz glass reactors

Key Facts

- Fixed-bed and fluidized-bed
- Temperature: up to $1000\text{ }^{\circ}\text{C}$
- Input: 1-10 g char
- Atmosphere: CO_2 , N_2

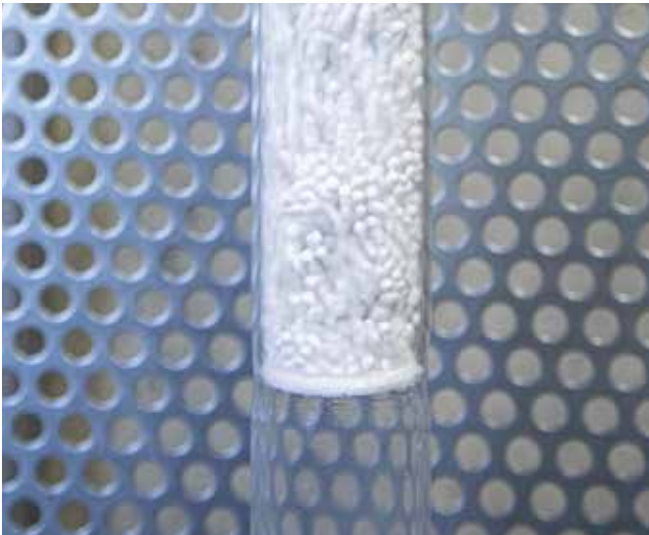

PYMEQ Pyrolysis Plant

The PYMEQ is a pyrolysis drop tube reactor with adjustable heated length for the determination of the pyrolysis behavior and the influence of residence time. For a closed balance, the condensable volatiles can be captured and the pyrolysis gas can be analyzed.

Key Facts

- Temperature: 800 °C
- Pressure: 100 bar(g)
- Throughput: 10 g/min solid feedstock of 40-100 µm
- Up to 2.5 m heated length with ID = 20 mm
- Purge/reaction gases: 400 l(STP)/h Ar + H₂ + CO₂ + CH₄ + steam
- Inner tube of alumina alloy with movable char collector
- Online gas measurement via mass spectrometer

R&D Focus

- Influence of process parameters on pyrolysis behavior of different feedstock qualities
- Mass, element and energy balances
- Char properties
- Chemical composition of tar/oil
- ...



DPA Pyrolysis Plant

The DPA is a pressurized pyrolysis plant that can be operated in drop tube or fixed bed mode. A multi-stage condensation system is available to capture the condensable volatile products.

Key Facts

- Temperature: 800 °C
- Pressure: 30 bar(g)
- Throughput: 30 g/min solid feedstock
- Electrical heating
- 1.5 m heated length with ID = 20 mm
- Purge/reaction gases: 2500 l(STP)/h Ar, 60 l(STP)/h CO₂, 1 kg/h steam

R&D Focus

- Influence of process parameters on pyrolysis behavior of different feedstock qualities
- Mass, element and energy balances
- Char properties
- Chemical composition of tar/oil
- Drop-in heating/slow heating
- ...

Pyrolysis Rotary Kilns

R&D Focus

- Process development for chemical recycling
- Thermochemical pretreatment of biomass and waste
- Production of carbon adsorbents via pyrolysis, partial gasification or carbon deposition
- ...

Rotary Kiln (XERION)

Key Facts

- Temperature: $\leq 1300\text{ }^{\circ}\text{C}$
- Pressure: atmospheric pressure
- Electrical heating
- Power: 39 kW
- Feedstock: pulverized or pelletized ($\leq 9\text{ kg/h}$)
- Atmosphere: N_2 , H_2O_D , O_2
- Purge gas quantity: $1.2\text{ m}^3/\text{h}$ (STP)
- Flexible residence time
- Three-stage condensation with heated particle filter
- Complete product recovery for mass and energy balancing
- Gas sampling



Rotary Kiln (Linn High Therm)

Key Facts

- Temperature: $\leq 1200\text{ }^{\circ}\text{C}$
- Pressure: atmospheric pressure
- Feedstock: $\leq 5\text{ mm}$
- Atmosphere: Ar, steam, CO_2 , C_4H_{10}
- Batch or continuous mode (7 kg/h)
- Product recovery
- Gas sampling



Further Pyrolysis Equipment

R&D Focus

- Influence of feedstock and process parameters on pyrolysis behavior
- Mass, element and energy balances
- Preparation of large amount of char under defined conditions for further gasification experiences/analyses
- Preparation of carbon adsorbents

Retort Oven (GERO)

Key Facts

- Temperature: $\leq 1100\text{ }^{\circ}\text{C}$
- Pressure: atmospheric pressure
- Input: $\leq 3\text{ kg}$
- Atmosphere: N_2
- Liquid product recovery
- Gas sampling



LPA fixed-bed reactor

Key Facts

- Temperature: $\leq 800\text{ }^{\circ}\text{C}$, 1-150 K/min
- Pressure: atmospheric pressure
- Input: 20-50 g solid feedstock $\leq 6\text{ mm}$
- ID = 20 mm
- Complete product recovery for heat and material balancing



ALPA fixed-bed or drop-in reactor

Key Facts

- Temperature: $\leq 1000\text{ }^{\circ}\text{C}$
- Pressure: 10 bar
- Input: 150 g solid feedstock $\leq 10\text{ mm}$
- Atmosphere: Ar and H_2
- ID = 20 mm
- Complete product recovery for heat and material balancing



Further Bench-Scale Equipment

Simple Particle Disintegrator (SPaltor)

Key Facts

- Temperature: $\leq 1550\text{ °C}$ (1600 °C shortly)
- Pressure: atmospheric pressure
- Feedstock: $\leq 3.5\text{ mm}$
- Atmosphere: Ar, N₂
- Images: refresh rate max. 1000 images/s with max. resolution 1280 x 1024 pixel

R&D Focus

- In-situ observation of particle behavior in a drop tube under drying and pyrolysis conditions, coupled with a high speed camera



Large Sample Furnace

Key Facts

- Temperature: up to 1800 °C
- Pressure: atmospheric pressure
- Atmosphere: Ar, N₂, H₂, CO
- Sample space: 500 x 600 mm

R&D Focus

- Testing of refractory linings/materials under different gas atmospheres and ash/slag exposure



Gasification equipment for reduction in fixed bed (GeRix)

Key Facts

- Reactor temperature: up to 1850 °C
- Heating rate: up to 10 K/min
- Pressure: atmospheric
- Reactor type: fixed bed
- Feed volume: 3.4 ml
- Gas atmosphere: H₂, CO, CO₂, O₂, Ar, N₂

R&D Focus

- Transfer of phosphorus into the gas phase via gasification
- Separation of gaseous phosphorous from raw gas
- ...




High Temperature Quench Furnace

Key Facts

- Temperature: $\leq 1800\text{ }^{\circ}\text{C}$
- Pressure: atmospheric
- Atmosphere: N_2 , CO , CO_2
- Feedstock: slag samples

R&D Focus

- Melting the slag up to a defined temperature under reducing atmosphere
- Freezing the slag state (crystallization of slag components) at appropriate temperature for further analysis (i.e. super cooling effects)

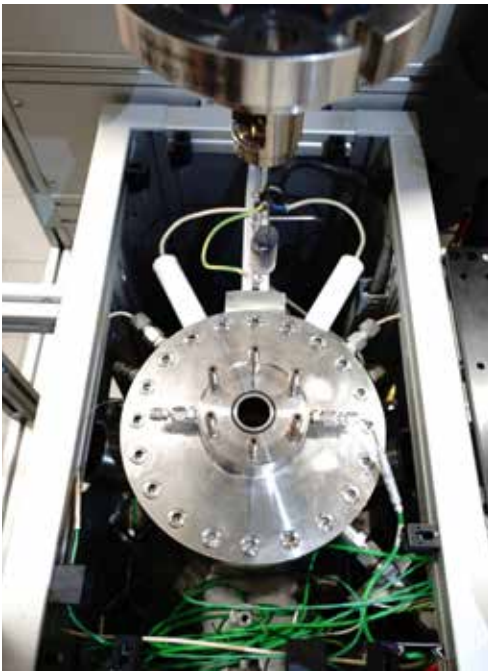

Pressurized Thermogravimetric, Thermographic and Spectroscopic Analysis (HITECOM)

Key Facts

- Temperature: $\leq 1300\text{ }^{\circ}\text{C}$
- Pressure: $\leq 30\text{ bar}$
- Atmosphere: Ar , N_2 , CO , CO_2 , O_2 , H_2 , H_2O (steam)
- Feedstock: single particle: $\leq 4\text{ g}$, maximum particle size: 15 mm
- 4 optical ports (perpendicular to the flow direction)
- In-situ measuring technology (thermogravimetry, thermography, spectroscopy)

R&D Focus

- Spatial and time resolved characterization of thermochemical conversion of single particles in directed flow
- Fundamental research and advanced CFD validation
- Temperature map on the particle surface
- Temperature and concentration profiles in the boundary layer around particles

Universal Electron Beam Facility

The electron beam facility consists of two separate units for application-oriented and innovative R&D in the field of high-temperature materials and their material systems for application in thermochemical conversion processes such as plasma gasification.

Key Facts

Unit 1 (Wire-feed process)

- Beam generation: 150 kV
- Max. beam power: 0.5-30 kW
- Working chamber: approx. 4 m³

Unit 2 (Powder-based process):

- Beam generation: 60 kV
- Max. beam power: 0.5-6 kW
- Working chamber: 150x150x150 mm

Materials

Steels, non-ferrous metals, high alloys, refractory metals, high-entropy alloys, ODS materials

R&D Focus

- High-temperature materials and their material systems via powder-based or wire-feed additive manufacturing
- Development and investigation of function-integrated materials and structures using electron beam technology



ZENTRUM FÜR EFFIZIENTE
HOCHTEMPERATUR-STOFFWANDLUNG

Center for Efficient High Temperature Processes
and Materials Conversion (ZeHS)

LABORATORY FACILITIES

Overview of Laboratory Equipment

Sample Preparation Lab

- Sieve analysis
- Camsizers (particle size distribution)
- Sample dividers
- Mills (cutting mill, impact mill, ultracentrifugal mill, freezer mill)
- Tablet/pellet press
- high-temperature microwave pressure digestion

Solid Feedstock Lab

- ETV-ICP OES – electrothermal vaporization – inductive coupled plasma – atomic emission spectroscopy for multi-element-analysis, temperature dependent element release in combination with elemental speciation
- Elemental (ultimate) analyzer (for solids and liquids)
- Combustion calorimeter (for solids and liquids)
- Karl-Fischer titrator (for solids and liquids)
- Direct mercury analyzer (for solids and liquids)
- Coke reactivity index (CRI) and coke strength after reaction (CSR)
- Dilatometer (high temperature/Ruhr)
- Gieseler plastometer

Pore Structure and Adsorption Lab

- Surface area measurement (N_2 and CO_2 isothermes)
- Mercury porosimetry
- Helium pycnometry
- Density measurement
- Adsorption test facility for Hg and SO_2

Gas and Liquid Lab

- Gas chromatography (various micro gas chromatographs with different columns and detectors)
- Ion chromatography
- GCxGC-TOF-MS with pyrolyser
- GC-FID with headspace sampler
- ICP-OES
- Viscometer (temperature controlled up to 200 °C)
- Density measurement
- DHA with SimDist

Ash/Slag Lab

- Plasma ashing device
- X-ray fluorescence analysis: XRF
- X-ray diffractometry XRD with in-situ temperature/pressure chambers
- Electron microscopy (SEM, FIB-SEM)
- Thermo-optical measurement systems for surface tension and characteristic ash melting temperatures (TOMAC, TOMMI)
- High-temperature slag viscometers
- Leitz heating microscope (LEM) for investigations of ash melting behavior (oxidizing or reducing atmosphere)

Thermal Analysis Lab

- Thermogravimetry (TG) for ambient & elevated pressure (up to 100 bar)
- Differential thermo-analysis (DTA)
- Differential-scanning calorimetry (DSC)
- Simultaneous analysis coupled with mass spectroscopy: TG-DTA-MS, TG-DSC-MS



HIGHLIGHTS OF LAB EQUIPMENT


X-Ray Fluorescence (XRF) and X-Ray Diffraction Analysis (XRD)

Key Facts

- Temperature: up to 1600 °C (three different chambers)
- Pressure: high vacuum to 20 bar (@ 1100 °C)
- Atmosphere: Air, N₂, N₂ + H₂
- Cu + Co radiation (standard diffractometer)

R&D Focus

- XRF enables the elemental analysis of solid and liquid feedstock as well as ash/slag
- XRD enables the determination and quantification of mineral phases as well as estimation of crystalline/amorphous content in ashes and other crystalline materials

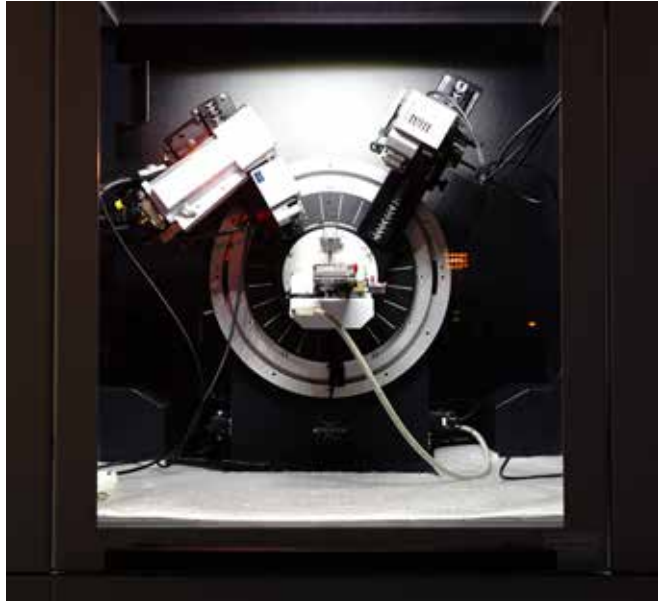

Scanning Electron Microscopy (SEM)

Key Facts

- SE, BSE, EDX, WDX detectors
- 3D analysis by "ion milling" (focused ion beam FIB), reconstruction software Avizo Fire
- Heating chambers (1500 °C)
- Gas injection: steam, CO₂

R&D Focus

- High resolution photographs and microanalysis of different samples





Thermo-Optical Measurement (TOMAC/TOMMI)

Key Facts

- Temperature: 1700/2000 °C
- Pressure: air (TOMMI), vacuum
- Atmosphere: N₂, Ar, Ar+H₂ (TOM-AC)
- Image recording with shape evaluation
- Load application, weight measurement
- Maximum bubble pressure
- Option for in-situ FTIR

R&D Focus

- Slag behavior under high temperatures
- Determination of material properties (e.g. surface tension)

High Temperature Viscometer

Key Facts

- Temperature: 650-1650 °C
- Atmosphere: air, CO/CO₂
- Viscosity range: 0.1-1500 Pas
- Heating/cooling rate: 0-10 K/min

R&D Focus

- Measurement of slag viscosity at high temperatures under different (gasification) atmospheres and shear rates
- Investigate non-newtonian slag behavior



Pressurized Thermogravimetric Analysis

Key Facts

- TGA (DMT Bergbauforschung GmbH)
- Temperature: ≤ 1100 °C
- Pressure: ≤ 100 bar
- Atmosphere: Ar, CO₂, O₂, H₂, CO, H₂O (steam)
- Input: ≤ 1 g
- Heating/cooling rate: ≤ 40 K/min
- Drop in mode (preheated furnace)

R&D Focus

- Investigate mass loss kinetics of pyrolysis and gasification
- Influence of process parameters and fuel properties



Thermal Analysis (TG, DSC, DTA, EGA)

Key Facts

- Devices:
 - TG-DSC
 - TG-DSC-MS
 - TG-DTA-MS
 - drop-DSC
- Parameters:
 - Temperatures: $\leq 600/1300/1650/2000$ °C
 - Pressures: atmospheric
 - Atmospheres: Ar, N₂, He, CO₂, vacuum, air, O₂, forming gas
 - Input: ≤ 500 mg

R&D Focus

- Investigate reaction kinetics and heat requirement
- Heat capacity measurement of solid feedstock
- Determination of phase changes, temperatures and enthalpies
- ...



Inductive Coupled Plasma Optical Emission Spectroscopy (ETV-ICP OES)

Key Facts

- Controlled programmable temperature (max. 2800 °C; max. heating rate 800 K/s)
- Atmospheres: Ar (with/without modifier, e.g. CCl_2F_2 , CF_4 , CHF_3 , NF_3 , O_2)
- Detect the temperature-dependent decomposition of the sample

R&D Focus

- Simultaneous quantitative multielement analysis of solids (after electro-thermal vaporization) and liquids (pure or after microwave digestion)



Comprehensive Gas Chromatography Mass Spectrometry (GCxGC-MS)

Comprehensive Gas Chromatography is an instrumental-analytical method that is particularly used for the analysis of complex mixtures of organic compounds.


Key Facts

- High-resolution gas chromatography method
- Structural analysis using a hyphenated time-of-flight mass spectrometer (TOF)
- Sample application depending on the analyte by liquid injection, headspace (HS) or solid phase microextraction (SPME)
- In-situ analysis of pyrolysis products using a pyrolysis unit directly coupled to the injector



R&D Focus

Products from various thermochemical processes or syntheses are analyzed using GCxGC-MS. The main application areas are pyrolysis oils from plastics, biomass or coal, as well as the comprehensive analysis of fuels such as synthetic kerosene. In addition, the coupling with an analytical pyrolyzer is used to investigate the chemical reactions occurring at the molecular level of materials such as plastics.

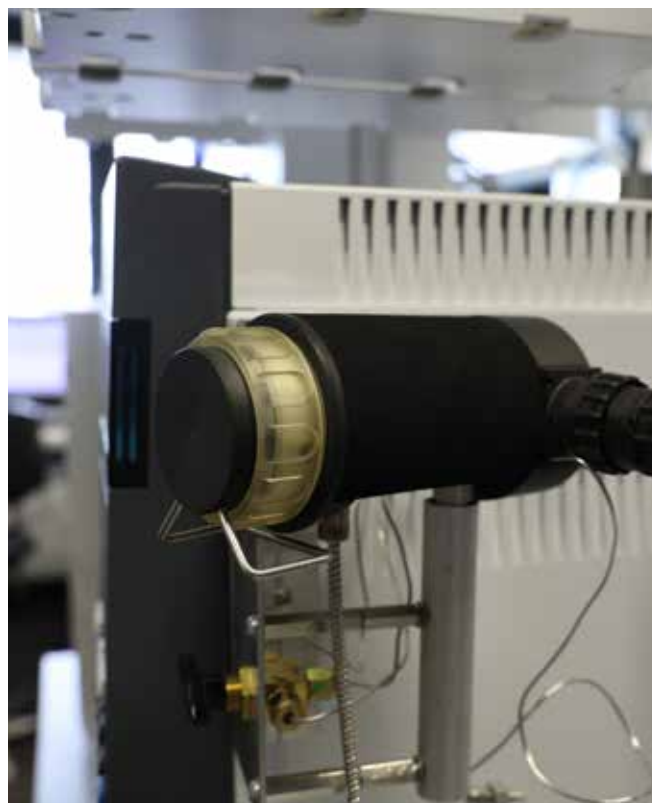

MODELING & SOFTWARE TOOLS


Various modeling and software tools are available for different research and development activities including in-house code, commercial and open source codes.

CAD

- AutoCAD
- AutoCAD P&ID
- Autodesk Inventor
- SolidWorks

Flow Sheet Simulation

- Aspen Engineering Suite: Aspen Plus, Aspen Dynamic, Aspen Custom Modeler, Aspen HYSYS
- Belsim Vali

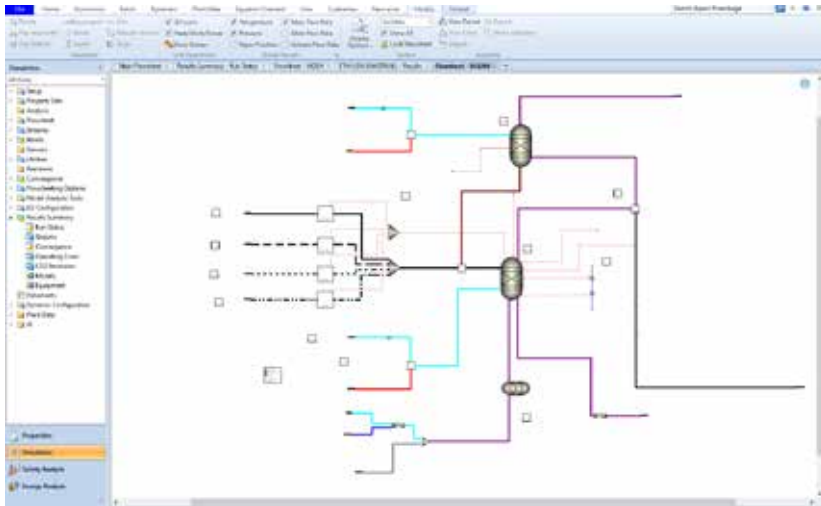


Mathematical Tools

- MathCAD
- MATLAB
- Origin
- Statgraphics
- Python
- MySQL database

Optimization

- modeFrontier

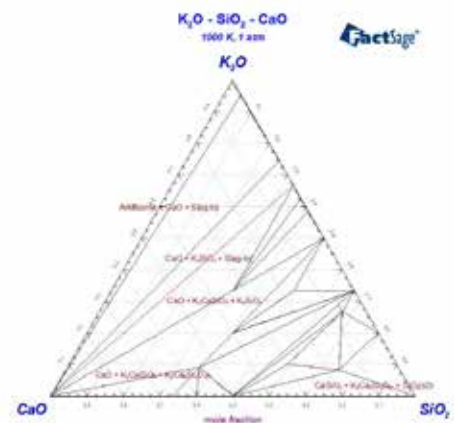

Life Cycle Assessment

- GaBi

Thermodynamics

- FactSage
- SimuSage

In cooperation with Chair MTK:

CFD Modelling and Mesh Generation

- ANSYS Fluent
- StarCCM+
- ANSA

R&D Service Portfolio

We offer a wide range of scientific and applied services that can be tailored to support your R&D goals. Contact us for discussions on a potential collaboration.

1. Scientific/technology consultancy & technical advisory:

- Due diligence (Probability-criticality analysis)
- Identification and evaluation of alternative conversion routes for carbonaceous feedstock
- Technological evaluation (e.g. conversion process, reactor design, burner design, refractory, components, feedstock preparation, handling of products and by-products)
- Process/technology optimization
- Technology screening
- Independent technology consulting & technical advisory, trouble-shooting
- ...

2. Laboratory & analytical services (especially high temperature/pressure processes):

- Feedstock analyses and evaluation
- Thermal analyses and characterization of feedstock
- Pore structure analyses
- Mineral matter analyses and characterization (e.g. slag viscosity)
- Pyrolysis and gasification behavior (kinetics)
- Characterization of feedstock and products
- ...

3. Process route evaluations & techno-economic-ecological assessments

- Development and modeling of syngas production routes (X_{TY})
- Feasibility studies including technology selection and economical evaluation
- Techno-economic & life-cycle impact assessments
- Identify process optimization and site integration opportunities
- Support of different project phases

4. Test campaigns:

- Test campaigns for all kinds of carbon feedstock
- Determination of feedstock suitability or process applicability
- Complete elemental and energy balances for main and minor elements including heavy metals, halogens, higher hydrocarbons, tar/oil, ...
- Evaluation of ash/slag qualities and composition of grey water
- Adjustment of different operational parameters for process optimization
- ...

5. Joint R&D, technology and process development/optimization

- New gasifier designs
- Robust burners with extended life-span for multiple feedstock
- Equipment/component tests
- ...

6. Utilization/transfer of patents for commercialization

CONTACT



M.Sc. Stefan Thiel

E-MAIL

Stefan.Thiel@iec.tu-freiberg.de

WEB

tu-freiberg.de/en/iec/evt/rd-services



Communication and Knowledge Transfer

INTERNATIONAL FREIBERG CONFERENCE



CONTACT



M.Sc. Antonia Helf

PHONE

+49 3731 39-4476

E-MAIL

ifc@iec.tu-freiberg.de

WEB

gasification-freiberg.com



Since 2005, the IEC has organized the „International Freiberg Conference“ – a leading international conference which addresses on the opportunities and challenges as well as innovations and developments in circular carbon technologies to pave the way towards a resource efficient, circular and climate neutral economy via the recirculation of carbon-containing waste as secondary raw materials for production. Carbon management in the anthropogenic, biogenic and atmospheric dimension is considered, especially with its implications for value chains and technology development.

Thermochemical conversion processes with a focus on gasification and pyrolysis are the key technologies that allow the recirculation of carbon from waste streams. Alongside with innovative electrification efforts via plasma, they form the center of the conference scope.

It provides a high-level interactive discussion forum at the nexus of science, technology, politics and society. Researchers, specialists, practitioners and diverse stakeholders will engage in intensive exchanges about the latest R&D developments as well as political/regulatory framework conditions for the transition towards a circular and net-zero emissions economy. Furthermore, technology developers and plant operators will also share insights into their current/planned projects as well as operational experiences along the entire feedstock-to-products value chain.

In addition to a stimulating scientific program, the conference will also include the opportunity to participate in exciting technical tours, as well as interesting networking events designed to facilitate networking and interaction between conference participants.

Previous conferences have been held in various locations in Germany as well as in The Netherlands and in China.

International Freiberg Conference Conference History & IEC's Co-Organizers



NETWORK FOR A CIRCULAR CARBON ECONOMY (NK2)

Carbon-containing raw materials are vital resources for the industry and underpin the wealth of numerous nations. A transition towards a circular carbon economy can enable carbon to be retained in the system rather than be emitted as climate polluting CO₂ upon combustion/incineration and/or landfilling. This however requires a change from business-as-usual and a coupling of the energy, chemical, engineering, waste management, recycling and other sectors (e.g. processing, lightweight construction and renewables).

To facilitate intersectoral dialogue and collaboration, the Network for a Circular Carbon Economy (in German: Netzwerk Kohlenstoffkreislaufwirtschaft i.e. NK2 Network) was initiated in 2019 by Fraunhofer IMWS and IEC, TU Bergakademie Freiberg. The NK2 Network provides a neutral platform for information exchange, knowledge sharing as well as intersectoral and international networking. Aim is to identify and address socio-technological-economic-ecological-political issues associated with the transition towards a circular carbon economy via workshops, experience exchanges, trainings and conferences, and to actively engage diverse stakeholders from industry, science, politics and civic society and contribute to socio-political dialogues about associated opportunities and challenges.

Key topics and focuses for NK2:

- Materials, processes and technologies for the conversion of solid carbon resources
- Integration of "green" hydrogen and renewable power
- CO₂-neutral, gas-based processes and syntheses for chemical basis materials and synthetic fuels
- New materials, material utilization & process design
- Information technology
- Systems and sustainability for a circular economy
- Political framework and legislations

NK2 partners include:

- Air Liquide Forschung und Entwicklung GmbH
- BASF SE
- CARBOLIQ GmbH
- CAC Engineering GmbH
- Chair of Decarbonization and Transformation of Industry, BTU Cottbus - Senftenberg
- Covestro Deutschland AG
- DBFZ Deutsches Biomasseforschungszentrum gemeinnützige GmbH
- Dow Olefinverbund GmbH
- Eurofins Umwelt Ost GmbH
- Fraunhofer IKTS
- Hallesche Wasser und Stadtwirtschaft GmbH
- Hochschule Merseburg
- IBExU Institut für Sicherheitstechnik GmbH
- LyondellBasell Polyolefine GmbH
- ROMONTA GmbH
- RWE Power AG
- Sächsisches Textilforschungsinstitut e.V.
- Synthos Schkopau GmbH
- TAF Thermische Apparate Freiberg GmbH
- ...



CONTACT



Prof. Dr.-Ing. Bernd Meyer
(Scientific Director)

Prof. Dr. rer. pol. Roh Pin Lee
(Scientific Coordination)

E-MAIL
circular-carbon@iec.tu-freiberg.de

WEB
tu-freiberg.de/en/iec/evt/nk2



COMPACT COURSES

CONTACT



Dr.- Ing. Sindy Bauersfeld

PHONE

+49 3731 39-4536

E-MAIL

compact-course@iec.tu-freiberg.de

WEB

tu-freiberg.de/en/iec/evt/
knowledge-transfer/training



IEC-EVT offers intensive compact courses in the field of thermo-chemical conversion. Courses provide a detailed introduction to the scientific fundamentals, process routes and technologies of the following topics:

- Chemical recycling
- Biowaste utilization
- Pyrolysis/Gasification
- Synthesis gas production
- Synthesis gas purification
- IGCC power plants
- ...

Leading commercialized carbon conversion technologies are presented in detail. The course program also provides introduction to various simulation and assessment software tools (e.g. LCA, TEA).

On-site courses also include technical tours of IEC's extensive laboratory, bench-scale and pilot-scale facilities and optional off-site technical visits.

The courses are targeted at:

- Engineers, technical, management and R&D personnel
- Technology companies and organizations which are engaged in sustainability, circular carbon and decarbonization activities and which would like to update and expand their knowledge on innovative carbon value chains and alternative feedstock and conversion routes

The limited number of participants allows for intensive interactive exchanges with experts providing the course. To ensure a high level of quality, experienced specialists from the industry are invited to present special topics in the courses.

Compact courses are being offered regularly by IEC-EVT since 2005. Employees from leading national and international companies from diverse sectors have participated in previous courses including ArcelorMittal, Alstom, BASF, Covestro, Dow, Ebara, EDL, E.ON, Enerkem, Haldor Topsoe, Hydro Oil and Energy, INEOS Inovyn, Johnson Matthey, Linde, MAN, MOL, RWE, Saint Gobain, Shell, Siemens, Total, VNG,...





CARBON DISCOVERY TRAIL

In 2020, IEC launched the Carbon Discovery Trail (in German: Wissensreise Kohlenstoff) at Reiche Zeche in Freiberg, Germany. Aim is to engage the general public to increase their awareness about the carbon challenge, and provide them with insights into how R&D activities in IEC contribute to solutions to address global challenges ranging from climate change, extreme weather, waste crisis, resource depletion to import dependency.

The Carbon Discovery Trail takes visitors on a journey through:

- What is Carbon?
- The Carbon Dilemma
- We Need a Carbon Transition!
- Our Institute
- Carbon Transition Technologies
- Innovations for Sustainable Products

It is open daily from 8:00 to 20:00 and welcome visitors to take a walk through the trail independently, or to contact us to arrange for a guided tour.

CONTACT



M.Sc. Malena Peuker

PHONE
+49 3731 39-4577


E-MAIL
Malena.Peuker@iec.tu-freiberg.de




Note

A large grid of small dots for taking notes, covering most of the page.

Note

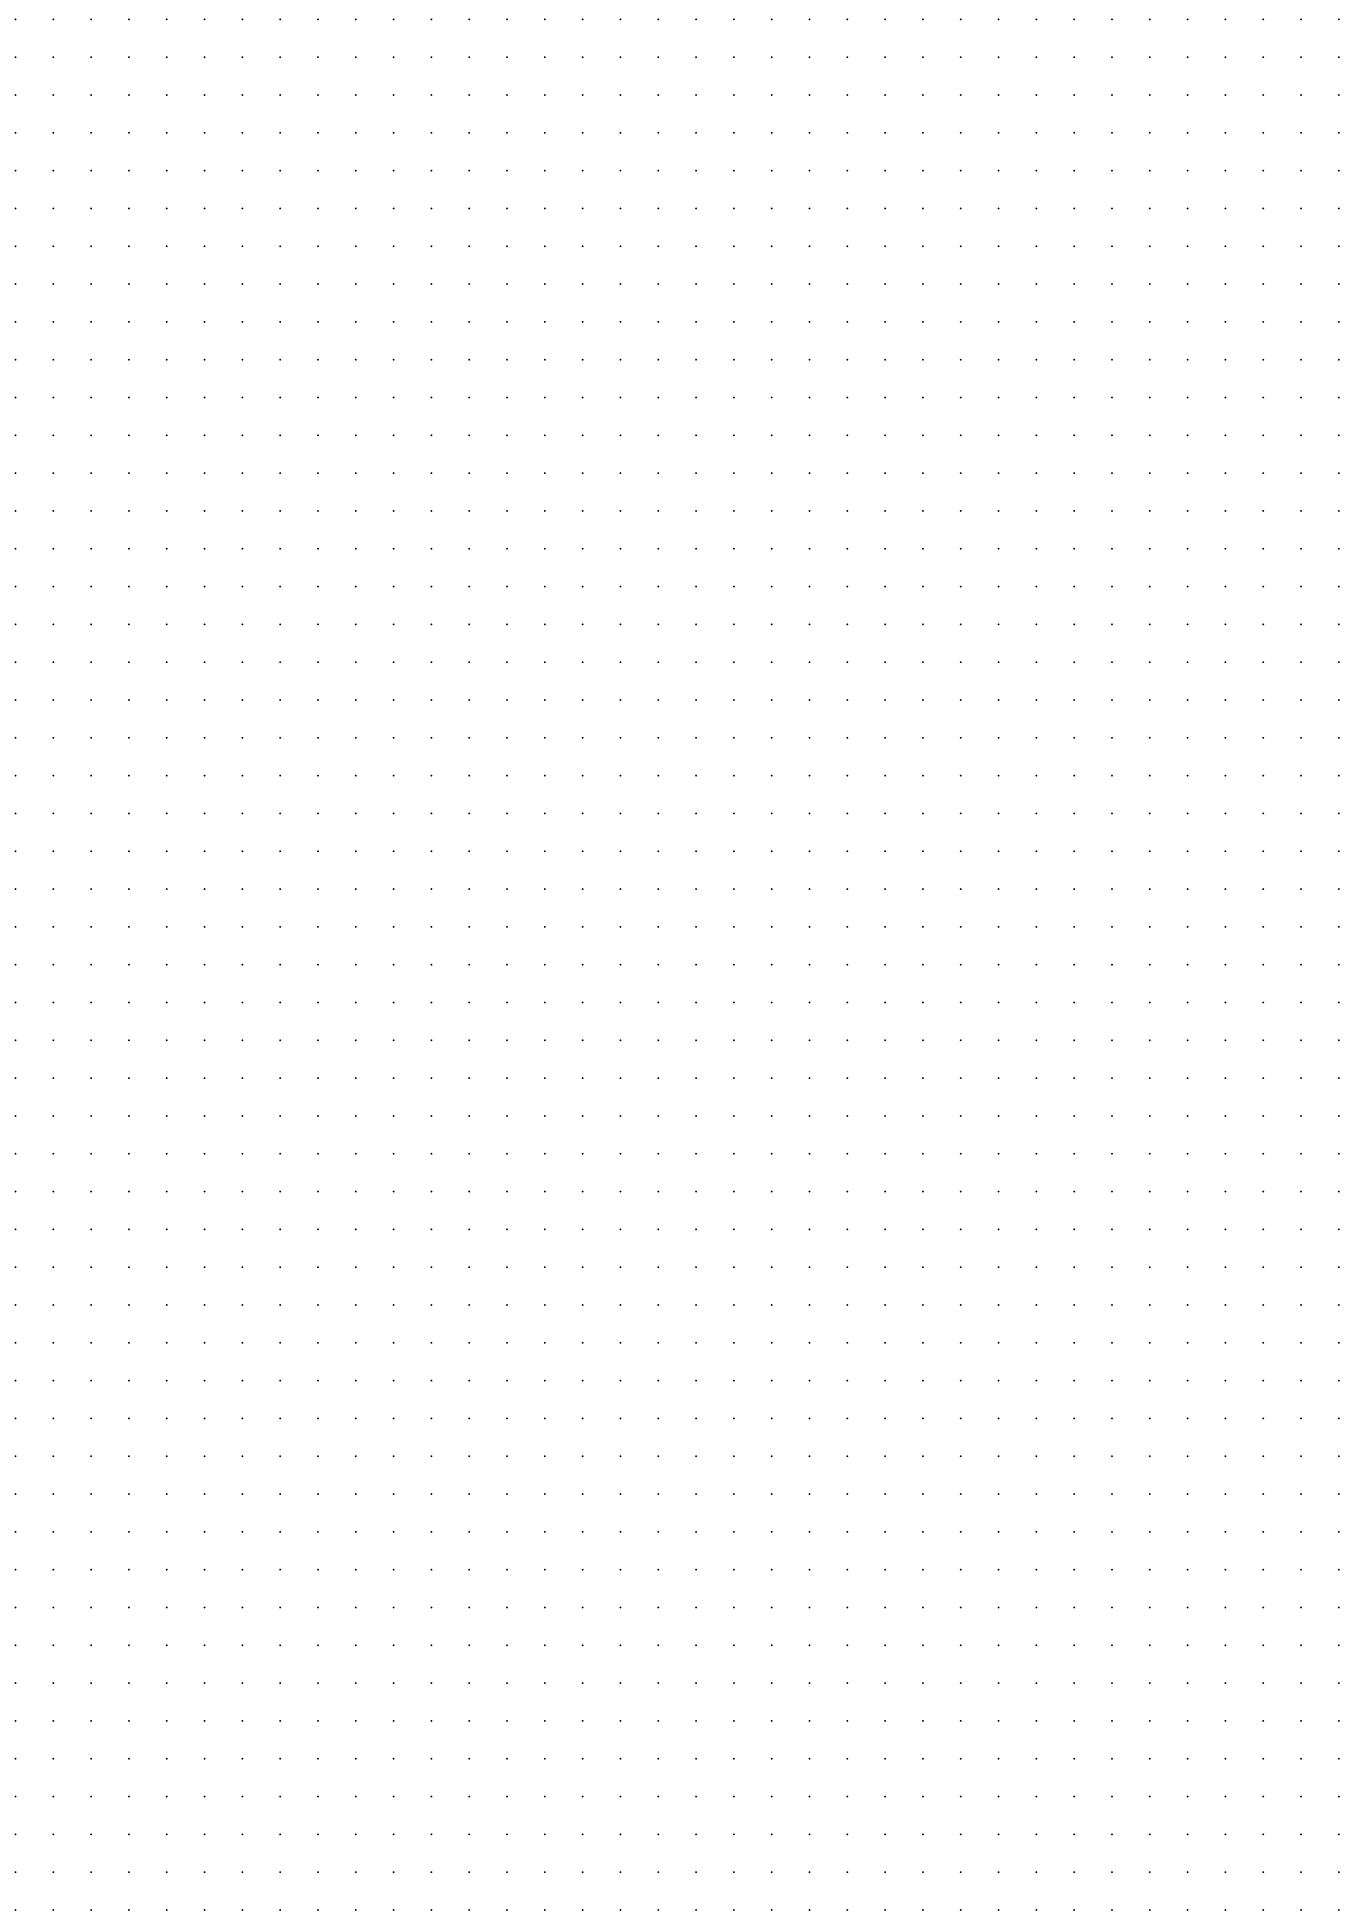

Note

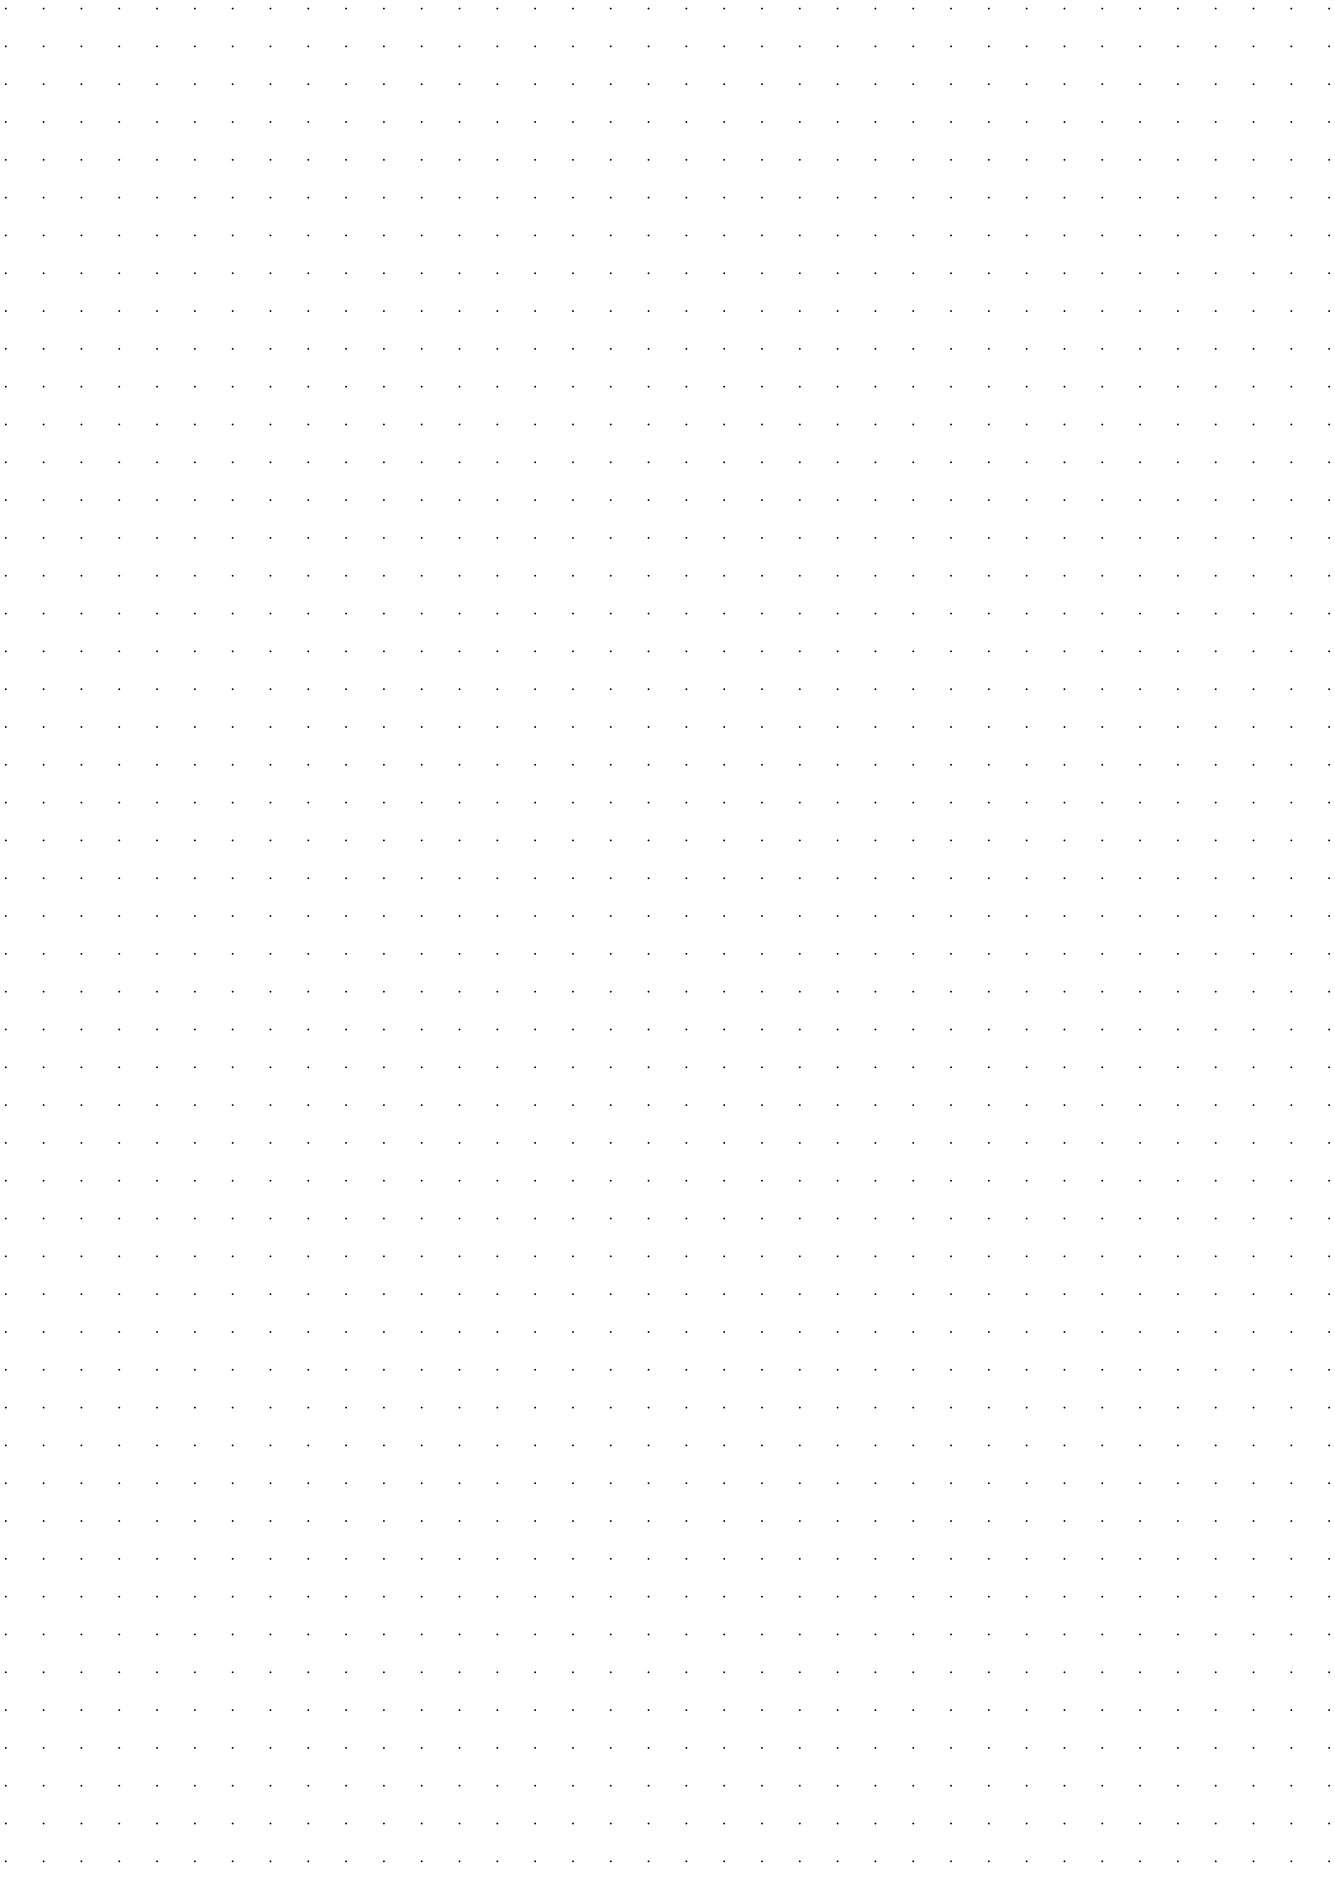

IMPRINT

EDITORS

Prof. Dr. rer. pol. Roh Pin Lee

Prof. Dr. Martin Gräbner

EDITORIAL SUPPORT

Dr. Sindy Bauersfeld

Dr. Felix Baitalow

Wei Fu

Dr. Stefan Guhl

Antonia Helf

Dr. Jörg Kleeberg

Dr. Steffen Krzack

Dr. Felix Küster

Dr. Ronny Schimpke

Dr. Marcus Schreiner

Olaf Schulze

Dr. Peter Seifert

Stefan Thiel

GRAPHIC & LAYOUT

Grit Tobis

GRAPHIC SUPPORT

Christoph Scharm

Stefan Thiel

CONTACT

TU Bergakademie Freiberg
Institute of Energy Process Engineering and Chemical Engineering
Professorship of Energy Process Engineering
Fuchsmuehlenweg 9 D, 09599 Freiberg/Germany



PHONE +49 3731 39 4511
E-MAIL info-evt@iec.tu-freiberg.de
WEB iec.tu-freiberg.de



 IEC Freiberg



 [iec_freiberg](https://www.instagram.com/iec_freiberg)



 IEC TU Freiberg